

CERAMIC COLOR & CHEMICAL MANUFACTURING CO.

Our Multipurpose Inclusion Color Selections

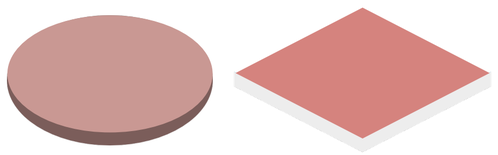

11901-A Red

Cd-Se-S-Zr-Si
CAS: 72828-62-7

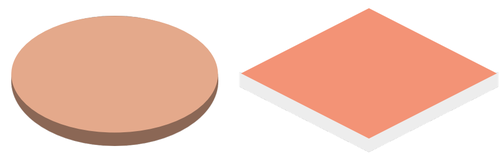

11906-A Orange

Cd-Se-S-Zr-Si
CAS: 72828-62-7

Disclaimer

Actual product colors may vary from appearance on screen. Various devices display colors differently. Colors are dependent on media, firing temperatures, and firing cycles. These product color representations serve as references only.

High Fire: High fire glaze colors were developed using a 3% pigment loading in a clear cone 8 glaze (90%) with opacifier included (10%). Representative tiles were fired at 1200˚C with a 1 hour dwell time.

Low Fire: Low fire glaze colors were developed using 3% pigment loading in a clear cone 2 glaze (90%) with opacifier included (10%). Representative tiles were fired at 1090˚C with a 12 minute dwell time.

Body colors were developed at 1% pigment loading in a representative ceramic body composition. Samples were pressed into discs and fired at 1200˚C with a 1 hour dwell time.

Ceramic Color & Chemical Manufacturing Company • PO Box 297 • New Brighton, PA 15066 • United States
+1 724.846.4000 I customerservice@ceramiccolor.com